



# SPECIFICATIONS


# sparkeology™

## PRODUCT

**MANNY**

## DIMENSIONS

SQUARE	ROUND
19W X 19D X 19H	19DIA X 19H
32W X 32D X 19H	27DIA X 19H
44W X 44D X 19H	45DIA X 19H
	62DIA X 19H

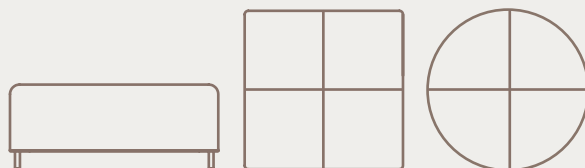

## SPECIFICATIONS

**SQUARE UNIT FRAME STRUCTURE:** The frame structure shall incorporate four vertical side panels, one top panel and one bottom panel. The joinery features precision engineered rabbet and dado construction, designed to provide a positive, interlocking assembly. This design provides maximum weight support and rigidity. Components are fabricated from upholstery grade, 15/16"t, 7-ply fir plywood. All joints are glued and mechanically fastened, all joints are flushed prior to upholstery.

**ROUND UNIT FRAME STRUCTURE:** The frame structure shall incorporate multiple vertical panels to support the six ply outer shell, one top panel and one bottom panel. The joinery features precision engineered rabbet and dado construction, designed to provide a positive, interlocking assembly. This design provides maximum weight support and rigidity. Components are fabricated from upholstery grade, 6 and 7-ply fir plywood. All joints are glued and mechanically fastened, all joints are flushed prior to upholstery.

**CUSHIONING:** Cushioning shall include a top panel of 3 inch thick, fire retardant polyurethane foam of 2.8 lb density and 45 lb IFD. The vertical outside surfaces shall receive a 3/4" inch thick, fire retardant polyurethane foam of 2.8 lb density and 30 lb IFD at 25% deflection. The underside of the assembly shall be painted black. The Pad cushions must be tested in accordance with all of the following standards:

1. All foams shall meet California Technical Bulletin 117 for flammability.
2. All fabrics shall be Class A fire rated in accordance with Commercial Standard CS-191-53.
3. The fully upholstered unit shall be tested in accordance with BIFMA F-1-1978 (Rev. A80), First Generation Voluntary Upholstered Furniture Flammability Standard for Business and Institution Markets.

**LEGS:** legs shall be constructed of 16 gauge tube steel fillet welded to an 11 gauge top plate. The legs shall be fastened to the underside of the casework by means of (5) #14 x 1" pan head screws prior to upholstery.

**TRIM:** shall be constructed of 11 gauge steel fastened proud to underside of the case by means of #8 x 5/8" pan head screws prior to upholstery.

**ELECTRICAL (for Manny's with Power):**

The electrical solution is a (4) simplex receptacle dome located in the center of the inner box. The power dome has (2) 15 amp, 7 foot, molded straight plug cords. The power dome is UL listed and CSA certified.

The cases are leveled by means of (4 or 6) 1-3/8" diameter black nylon glide with a stainless steel stem.

**UPHOLSTERY:** All upholstery shall be a tight, weltless design with over stitching creating a quartered appearance.

**NOTE:** Over stitching thread is gray.

This unit ships fully assembled.